
EnersealÂ® Spring Energized Seals |Face seals EnersealÂ® internal pressure

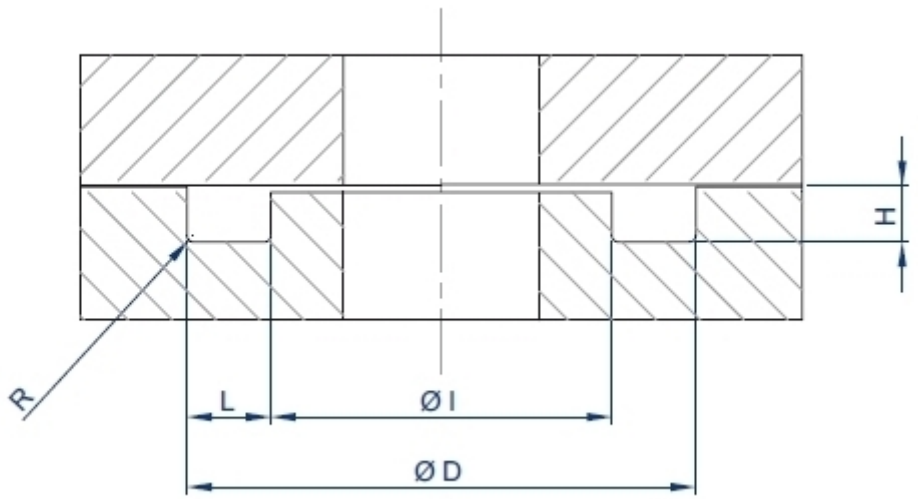

Spring Energized Seals Enerseal®, custom and standard dimensions available. Jacket in PTFE compound, PEEK, UHMW-PE, PU 54Sh.D. Jackets and electro-welded springs are designed and realized within the company, so that HD has the complete control of the production process. Spring are available in Aisi302, Elgiloy, Hastelloy and **NACE approved Inconel X750**.
For the "V" shaped cross sections up a max. D diameter of 250, an optional EU-FDA approved white silicone filling is available.

Spring Energized Seals Homepage

AVAILABILITY

To check the availability:
-choose profile and compound from the drop-down menu
-input the desired housing class
-input the desired diameter
Once obtained the availability, a request for quotation can be sent.

MATERIALS

Click compound's code to download the .PDF data sheet (login requested)

HD Slippers code	Composition	Color	Approvals	ΔT °C	Description
N-009	Ptfe-oxides	blue		-268 +260	All pourpose on soft surfaces
N-095	Tfm	white	FDA	-268 +260	Low creep, better strength.
N-031	Ptfe-bronze	green-blue		-268 +260	High wear resistance, hidraulic seals
N-032	Ptfe-carbon	black		-268 +260	High wear resistance, pneumatic and hydraulic seals
N-197	Ptfe-carbographite	black	NORSOK	-268 +260	High wear resistance, hydraulic and pneumatic seals
N-043	Ptfe-graphite	black	FDA	-268 +260	High wear resistance, low friction coefficient.
N-060	Ptfe-glass fibre	blue	FDA	-268 +260	All pourpose on hard surfaces
N-067	Ptfe-glass fibre	white	FDA NORSOK	-268 +260	High wear and creep resistance
N-033	Ptfe-glass fibre MoS2	gray	FDA	-268 +260	Fit for hard surfaces
N-103	Ptfe-Carbon fibre	black		-268 +260	Fit for hard surfaces
N-102	Ptfe-Liquid crystal polymer	beige	FDA - EU	-268 +260	Food & Pharma, fit for soft surfaces
N-088	Ptfe-polyimide	yellow		-268 +260	Fit for soft surfaces
N-074	PEHMW	white	FDA	-140 +80	High wear and extrusion resistance
N-155	PVDF	white	FDA	-30 +140	High modulus
P95-A252	Polyurethane	blue	FDA	-50 +105	Extrusion and wear withstanding, low friction coefficient
P95-VI251	Polyurethane	violet	FDA	-30 +115	CIP (clean in place) fluids compatible
P95-R198	Polyurethane	red		-30 +125	Extrusion and wear withstanding, low friction coefficient, high temperatures
P95-AR255	Polyurethane	orange		-30 +135	Extrusion and wear withstanding, low friction coefficient, higher temperatures
P95-G253	Polyurethane MoS	gray		-30 +105	Extrusion and wear withstanding, lower friction coefficient

CHOOSING Neuflon-ptfe compound ACCORDING WITH FLUID AND SURFACE

	SURFACES				
	Steel HEC>=30-45 Temp. Mart. Inox Steel Cast Iron HRB<=200 Steel HRC>=45 Cast Iron HRB>200	Galvanic or chemical surfacing HV>=700 Chromium Bronze	Bronze Brass	Treated Aluminium	Aust. Inox Steel Glass
FLUIDS	**NEUFLON-ptfe compounds (standard in bold)**				
Hydraulic oil Transmission oil Fire resistant syntetic hydraulic oil	**N-031** N-032 N-060 P95-A112	**N-031** N-032 N-060 P95-A112	**N-009** N-043 N-032 P95-A112	**N-032** N-074 P95-A112	**N-009** N-032 N-074 P95-A112
Water and oil/water emulsions	**N-032** N-060 N-074	**N-032** N-060 N-074	**N-009** N-043 N-074	**N-032** N-074	**N-009** N-032 N-074
Drugs and food	**N-074** N-102 N-043 N-060 N-095 P95-B113	**N-009** N-074 P95-B113	**N-102** N-009 P95-B113	**N-009** N-074 P95-B113	**N-009** N-074 P95-B113
Air	**N-032**	**N-032**	**N-032**	**N-032**	**N-032**

	N-031 N-043 N-074 P95-A112	N-043 P95-A112	N-009 N-043 N-074 P95-A112	N-074 P95-A112	N-009 N-043 N-074 P95-A112
Steam	**N-032** N-043	**N-032**	**N-009** N-032 N-043		**N-032** N-009 N-043
Acids and Bases	**N-032** N-074	**N-032** N-043 N-074			**N-009** N-032 N-043 N-074

SEAT

housing class	D dimensional range	I inner diameter	H groove depth	L standard	L* reinforced heel	R max.
internal pressure	H8		H8		H12	
GI	20 - 50	**D - 2L**	1,45	2,4	3,8	0,4
LI	20 - 240		2,25	3,6	4,65	0,4
HI	25 - 400		3,1	4,8	5,7	0,6
NI	45 - 650		4,7	7,1	8,5	0,8
MI	80 - 1200		6,1	9,5	11,2	0,8
RI	150 - 1200		9,5	13,4	15,8	0,8

*Always choose reinforced heel when pressure exceeds 200 bar

Coding example

housing class NI
profile code 064
diameter D= 80
materials: jacket Neuflon 020 spring Aisi 314

Enerseal NI - 064 - 80 - N-020 - 314

FINISHES

SURFACE FINISH ACCORDING WITH FLUID		
application	**max Ra µm dynamic surface**	**max Ra µm static surface**
CRYOGENICS	0,1	0,2
FREON HELIUM HYDROGEN	0,2	0,3
AIR NITROGEN ARGON METHANE FUELS	0.2	0.4
WATER OIL	0.3 - 04	0.6
ROTARY SEALS		
Shaft surface	**Shaft hardness**	**Surface treating deep**
Ra 0.2 - 0.3 micron max. Rz 1.0 - 2.5 micron max. R max. < 4 micron	55 HRC min. for pressure up to 5 bar 60 HRC min. for pressure > di 5 bar 60 HRC for speed > 4m/sec	0.3 mm min.