


Guide rings |FR rod guide rings



Heavy duty conditions. Installed in the same housing as for FT and Neufilon-ptfe tape.

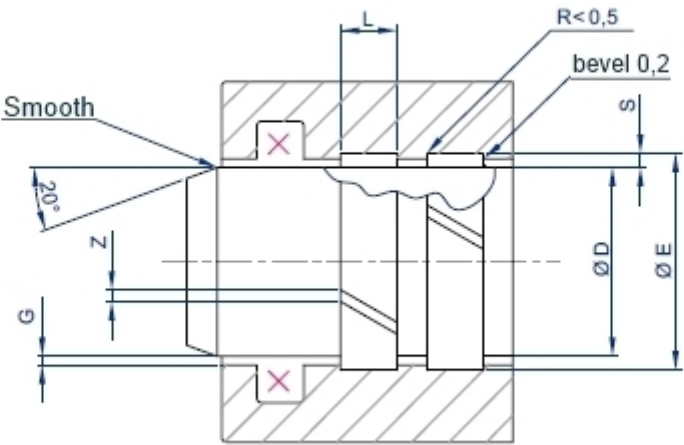

SEAT

S Thickness	F Groove diameter	L Groove width	G Rod-Box clearance
	J8 - H8	H11	max S x 0.4
2.5	D + 5	6.3	depends from the seal adopted max S x 0.4
2.5		8.1	
2.5		9.7	
2.5		15	
2.5		20	
2.5		25	
2.5		30	

Coding example	
Product: FR Groove diameter: 105 Rod: 100 Groove width: 15	FR 105 x 100 x 15



MATERIALS

CHARACTERISTIC	SPECIFICATION	UNIT	VALUE
Color			brown-yellow
SPECIFIC LOAD Qs T<100°C		N.mm-2	50
Compression resistance	D695-54	N.mm-2	150
Compression modulus	D695-54	N.mm-2	6000
Hardness	D2240-74	Rockwell F	60
Friction coefficient			0.25
Max. Speed		m/sec	1
Thermal expansion coefficient	D696-70	10-6°C-1	20
Continual operational Temperature		°C	120
Peak temperature		°C	150
Flammability	D635-68		self extinguishing